



# Test and Evaluation/Science and Technology Program Advanced Instrumentation Systems Technology (AIST) **Orientation and Posture TRACking system (TRAC)**

Mr. Matthew Davis, Luna Innovations

Mr. Philip Kaewsawatana, US Army Aberdeen Test Center

Ms. Elizabeth Richardson, US Army Aberdeen Test Center

Dr. Sheila Jones, Advanced Instrumentation Systems Technology

Dr. George Shoemaker, Advanced Instrumentation Systems Technology



**20<sup>th</sup> Test Instrumentation Workshop**

**13 May 2015**



# NASDAQ: LUNA

## Safe Harbor Statement Under the Private Securities Litigation Reform Act of 1995

Safe Harbor Statement for Purposes of the “Safe Harbor” Provisions of the Private Securities Litigation Reform Act of 1995: This presentation contains “forward-looking” statements, which are not historical facts, but are forward looking statements within the meaning of the Private Securities Litigation Reform Act of 1995. These statements relate to analyses and other information based on forecasts of future results and estimates of amounts not yet determinable. These statements also relate to our future prospects and proposed new products, services, developments or business strategies. These forward-looking statements are identified by their use of terms and phrases such as “anticipate”, “believe”, “could”, “estimate”, “expect”, “intend”, “may”, “plan”, “predict”, “project”, “will”, “continue” and other similar terms and phrases, including references to assumptions. Although we believe that the expectations reflected in any of our forward-looking statements are reasonable, actual results could differ materially from those projected or assumed. Our future financial condition and results of operations, as well as any forward-looking statements, are subject to changes and to inherent known and unknown risks and uncertainties. Such risks and uncertainties include those set forth in our SEC filings. We do not intend, and undertake no obligation, to update our forward-looking statements to reflect future events or circumstances.





# Test Community Need





- Measurements of warfighter posture, head angle, leg + arm positions and weapon orientation are critical to understanding the effectiveness of new equipment and limitations to the warfighter's range of motion.
- Non-line of sight situations create additional challenge in the ability to make these measurements.
- Need to evaluate warfighter range of motion while using new equipment and the effectiveness of their performance in solo and team scenarios.
- Current technology is not adequate to address these measurement needs accurately without influencing the test



POSITIONING OF PATIENT



goniometric measurement of COMPLETED MOTION

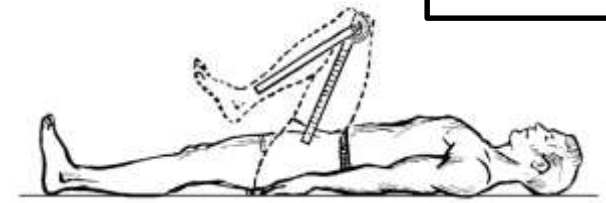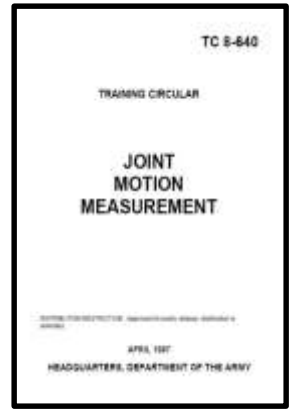

Static Conditions



Dynamic Conditions



# System Overview

## Orientation and Posture TRACking system (TRAC)




- TRAC is a lightweight body shape, head orientation, and posture measurement system
- Enable testing and evaluation of equipment and environmental effects on physiology (range of motion) in tactical (dynamic) scenarios
- Utilize fiber optic shape sensing technology integrated into a bodysuit as a means of providing the positions of the warfighter's body

### System components:


- Fiber Optic Shape Sensors
- Body Suit Integrator
- Portable electronic data acquisition system
- Signal processing software

# Technical Background – High Definition Fiber Optic Sensing



Reflected light from minute differences in the local index of refraction of the fiber core can be used to determine the degree to which the fiber is strained as a result of a thermal or mechanical stimuli.

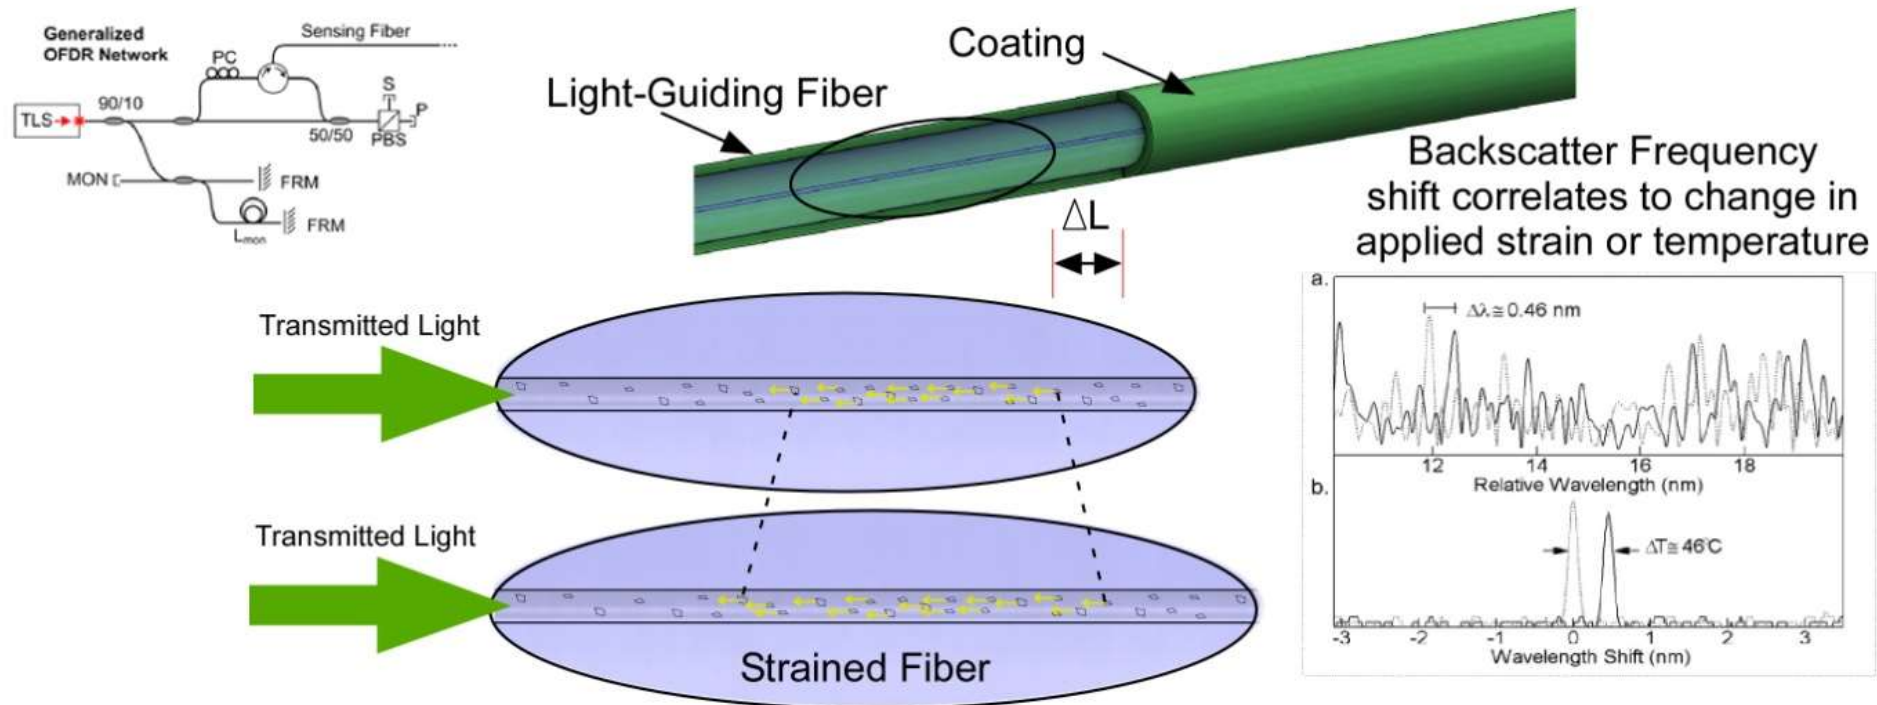

# Example of High Definition Fiber Optic Sensing of Strain

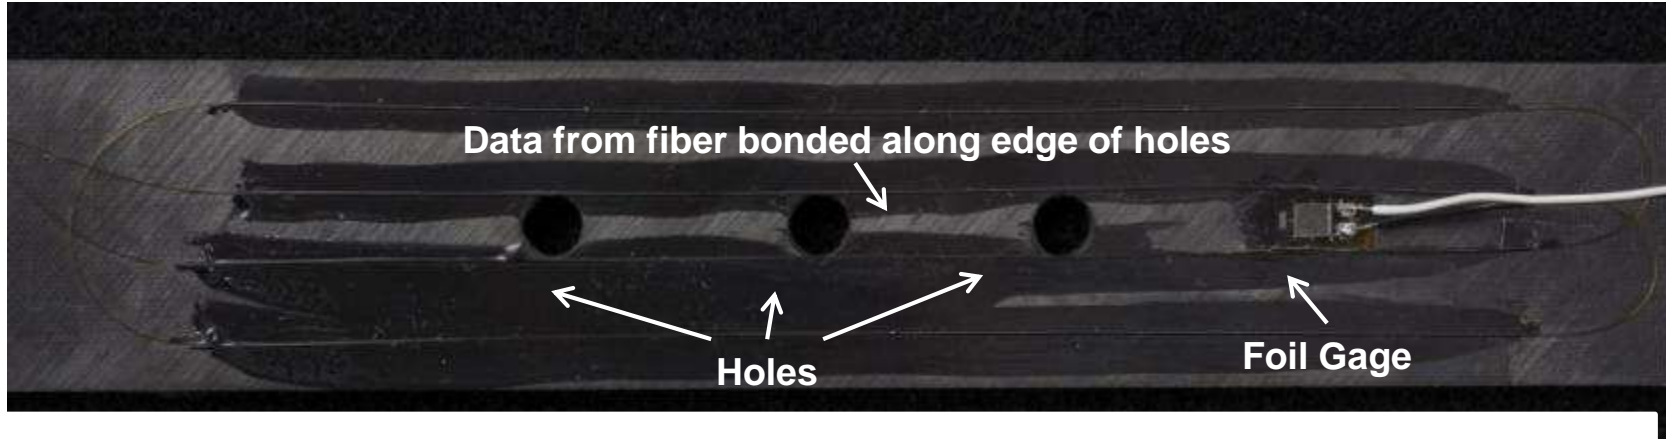



Carbon composite coupon loaded in cantilever beam configuration

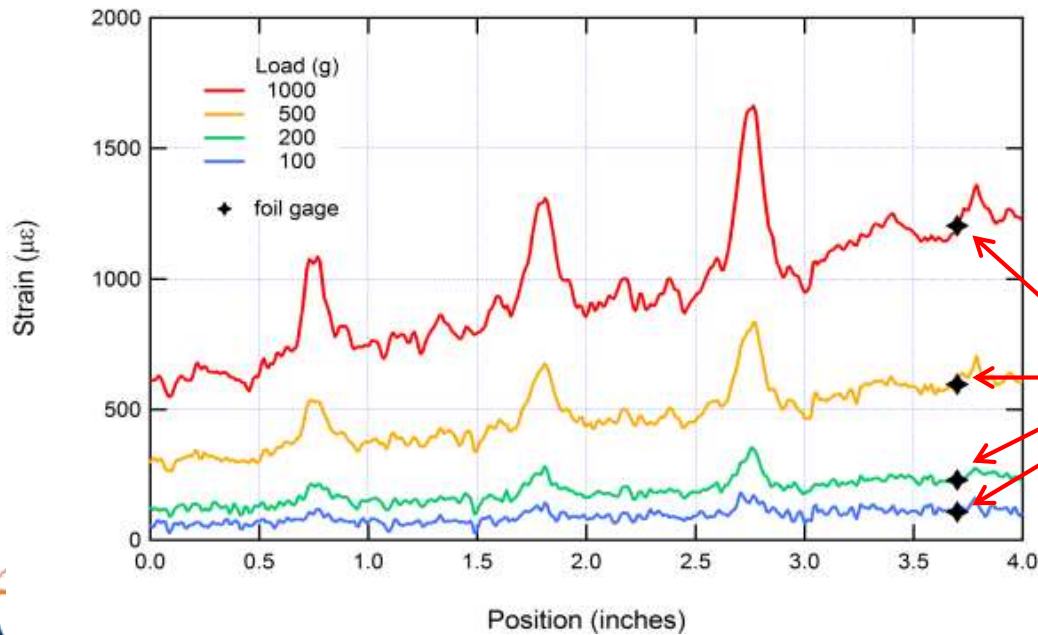

Foil gage data

# Sensing of Shape using Strain Measurements from Optical Fiber

- Helical, 4-core optical fiber
- Distributed strain measured on each core
- Differential strains converted to 3D shape
- Under curvature:
  - Alternating tension & compression on outer cores
- Under twist:
  - Common tension or compression on outer cores
- Under axial strain
  - All cores experience common tension

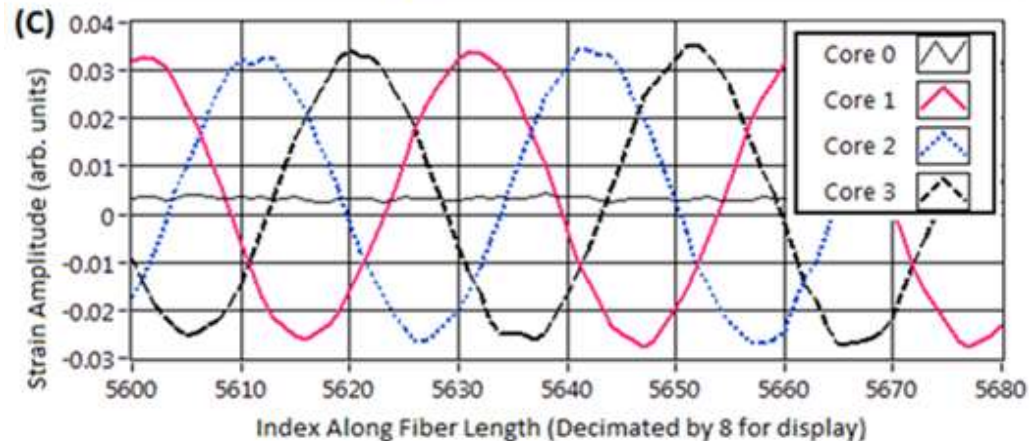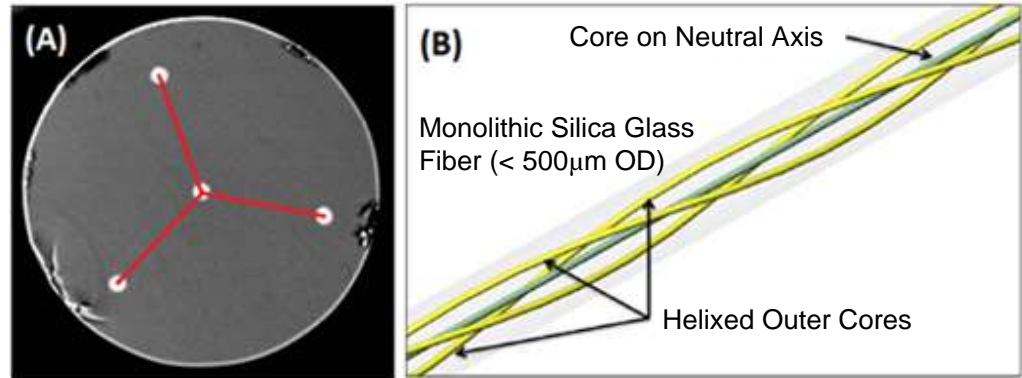


# System Level Integration

- Suit is fabricated from a lycra material with and mesh that allows the sensors to be routed based on the subjects physiology
- Located on the suit is a box containing the beginning point of the sensor measurement
- Sensors are connected to a battery powered acquisition system located in a pack on the users back



Box containing the sensors has an inertial measurement unit (IMU) to account for rotation of the subject in the global coordinate frame



System located in a backpack





# Human Factors and Durability Testing



A two days of testing were performed at Aberdeen Test Center to evaluate the durability and impact of the system on test subjects under relevant conditions

- Results from this testing are being used to improve the overall system design and integration
- 2 Army test subjects and 1 Luna representative were fitted with the suits and representative sensors
- Testing used standard telecom fiber in lieu of shape fiber
- Enabled durability to be assessed after each exercise by scanning with a reflectometer
- Range of Motion (ROM) study conducted to determine degradation
- Tactical Mobility Performance and Compatibility studied through 2 mile march, obstacle course, and weapons compatibility





# Human Factors Test



- Baseline range of motion (ROM) was assessed with the test subjects wearing ACU
- Second baseline with ACU and Improved Outer Tactical Vest (IOTV)
- Repeated for both cases with the TRAC unit as well
- A loss of ROM greater than 20° was considered significant.
- ROM measurements results showed a consistent loss in ROM for shoulder flexion for and knee flexion with the TRAC suit.
- The ROM data showed instances of anomalies, for TPN 1 in particular, where the results were not as expected. For example, a gain in ROM when a loss was expected.

| Measurement   | TPN 1 |                 |            |                 |                 |            | TPN 2 |          |            |          |               |            |  |
|---------------|-------|-----------------|------------|-----------------|-----------------|------------|-------|----------|------------|----------|---------------|------------|--|
|               | ACU   | ACU TRAC        | Loss/ Gain | ACU IOTV        | ACU TRAC IOTV   | Loss/ Gain | ACU   | ACU TRAC | Loss/ Gain | ACU IOTV | ACU TRAC IOTV | Loss/ Gain |  |
| Shoulder:     |       |                 |            |                 |                 |            |       |          |            |          |               |            |  |
| Flexion       | 176   | 152             | -24        | 141             | <sup>a</sup> 92 | -49        | 168   | 141      | -27        | 151      | 131           | -20        |  |
| Extension     | 72    | 80              | 8          | 80              | 61              | -19        | 88    | 83       | - 5        | 64       | 70            | 6          |  |
| Abduction     | 146   | 132             | -14        | 121             | 91              | -30        | 163   | 140      | -23        | 124      | 108           | -16        |  |
| Adduction     | 153   | 119             | -34        | 112             | 95              | -17        | 108   | 113      | 5          | 97       | 95            | - 2        |  |
| Elbow flexion | 139   | 123             | -16        | 140             | 115             | -25        | 133   | 134      | 1          | 139      | 117           | -22        |  |
| Hip:          |       |                 |            |                 |                 |            |       |          |            |          |               |            |  |
| Flexion       | 107   | 112             | 5          | 89              | 91              | 2          | 93    | 90       | - 3        | 85       | 77            | - 8        |  |
| Adduction     | 48    | 57              | 9          | 41              | 40              | - 1        | 47    | 52       | 5          | 45       | 51            | 6          |  |
| Abduction     | 75    | 78              | 3          | 74              | 61              | -13        | 67    | 68       | 1          | 61       | 61            | 0          |  |
| Knee:         |       |                 |            |                 |                 |            |       |          |            |          |               |            |  |
| Flexion       | 125   | 117             | - 8        | <sup>a</sup> 90 | 119             | 29         | 102   | 101      | - 1        | 90       | 97            | 7          |  |
| Extension     | 90    | 69              | -21        | 90              | 72              | -18        | 96    | 73       | -23        | 90       | 73            | -17        |  |
| Trunk:        |       |                 |            |                 |                 |            |       |          |            |          |               |            |  |
| Extension     | 73    | <sup>a</sup> 38 | -35        | 72              | 73              | 1          | 53    | 41       | -12        | 48       | 54            | 6          |  |
| Flexion       | 89    | 69              | -20        | 90              | 77              | -13        | 84    | 93       | 9          | 82       | 76            | - 6        |  |
| Head:         |       |                 |            |                 |                 |            |       |          |            |          |               |            |  |
| Flexion       | 72    | 59              | -13        | 84              | 69              | -15        | 56    | 55       | - 1        | 64       | 61            | - 3        |  |
| Extension     | 75    | 54              | -21        | 64              | 49              | -15        | 82    | 70       | -12        | 79       | 62            | -17        |  |
| Rotation      | 88    | 73              | -15        | 70              | 61              | - 9        | 79    | 63       | -16        | 60       | 60            | 0          |  |
| Lateral       | 61    | 54              | - 7        | 55              | 43              | -12        | 49    | 36       | -13        | 40       | 37            | - 3        |  |





# Human Factors Test

- Tactical Mobility Performance and Compatibility
  - 2-mi road march
  - Soldier Systems Test Facility (SSTF) portability course
- Static weapons compatibility trial with the M4.
- General comments were that the system was easy to don/doff
- Feedback from the testing concluded that the subjects did not feel much restriction wearing the suit
- Data collected on shock/vibration using accelerometers

TABLE B-2.2-3. MISSION ACTIVITIES EVENT RATINGS

| Mission                    | TPN 1           |                     |                             | TPN 2           |                     |                             |
|----------------------------|-----------------|---------------------|-----------------------------|-----------------|---------------------|-----------------------------|
|                            | Fit and Comfort | Soldier Performance | Compatibility/ Interference | Fit and Comfort | Soldier Performance | Compatibility/ Interference |
| <b>ACU and TRAC</b>        |                 |                     |                             |                 |                     |                             |
| Target acquisition:        |                 |                     |                             |                 |                     |                             |
| Standing                   | 5               | 5                   | 5                           | 5               | 5                   | 5                           |
| Kneeling                   | 5               | 5                   | 5                           | 5               | 5                   | 5                           |
| Prone                      | 4               | 4                   | 4                           | 5               | 5                   | 5                           |
| Foot march                 | 3               | 4                   | 4                           | 3               | 3                   | 4                           |
| Obstacle course            | 3               | 4                   | 4                           | 2               | 3                   | 3                           |
| <b>ACU, TRAC, and IOTV</b> |                 |                     |                             |                 |                     |                             |
| Target acquisition:        |                 |                     |                             |                 |                     |                             |
| Standing                   | 5               | 5                   | 5                           | 5               | 5                   | 5                           |
| Kneeling                   | 5               | 5                   | 5                           | 5               | 5                   | 5                           |
| Prone                      | 2               | 4                   | 4                           | 5               | 5                   | 5                           |
| Foot march                 | 2               | 4                   | 4                           | 3               | 4                   | 4                           |
| Obstacle course            | 2               | 4                   | 4                           | 3               | 5                   | 4                           |

| Poor |          | Neutral | Good | Excellent |
|------|----------|---------|------|-----------|
| Very | Slightly |         |      |           |
| 1    | 2        | 3       | 4    | 5         |



# Durability Test

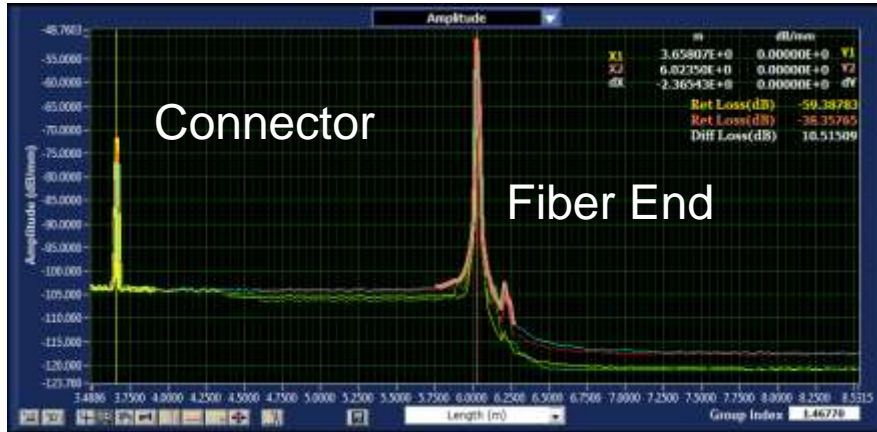


Table 1: Sensor lengths at various key stages of testing.

| Sensor Number | Initial Length | Suit Removed (Day 1) | Suit Donned (Day 2) | After Obstacle course with Body Armor | After Obstacle course without Body Armor | Upon Returning to Luna |
|---------------|----------------|----------------------|---------------------|---------------------------------------|--|------------------------|
| T7            | 2.365          | 2.365                | 2.365               | 2.365                                 | 2.365                                    | 2.365                  |
| T5            | 2.384          | 2.384                | 2.384               | 2.384                                 | 2.384                                    | 2.384                  |
| T8            | 2.402          | 2.402                | 2.402               | 2.402                                 | 2.402                                    | 2.402                  |
| T4            | 2.347          | 2.347                | 2.092               | 2.092                                 | 2.092                                    | 2.092                  |
| T9            | 2.566          | 2.566                | 2.566               | 2.566                                 | 2.566                                    | 2.566                  |
| T1            | 2.420          | 2.420                | 2.420               | 2.420                                 | XX                                       | 2.420                  |
| T2            | 2.347          | 2.347                | 2.347               | 2.347                                 | 2.347                                    | 2.347                  |
| T3            | 2.420          | 2.420                | 2.420               | 2.420                                 | 2.420                                    | 2.420                  |
| T6            | 2.402          | 2.402                | 2.402               | 2.402                                 | 2.402                                    | 2.402                  |
| T10           | 2.329          | 2.329                | 2.329               | 2.329                                 | 2.329                                    | 2.329                  |

Data from Sensor T7 used to determine the length of the sensor at different test intervals.




- Fiber durability was checked by measuring its length after each test
- Only one of the sensors, T4 located on the Left Arm of Subject 2, experienced a failure during the test.
- This failure was 30 cm from the end and would align with the subjects elbow.
- The remaining 9 sensors survived all of the studies as well as remaining installed into the suit as it was taken on and off twice.



# Residual Strain as a Result of Test Activities



- Residual strain was calculated using the backscatter pattern in the fiber
- Data aligned to where the shape measurement would begin
- 100  $\mu\epsilon$  or less residual strain was observed in the region of the sensor that would be used for shape sensing
- This level of residual strain is unlikely to significantly affect the shape measurement accuracy

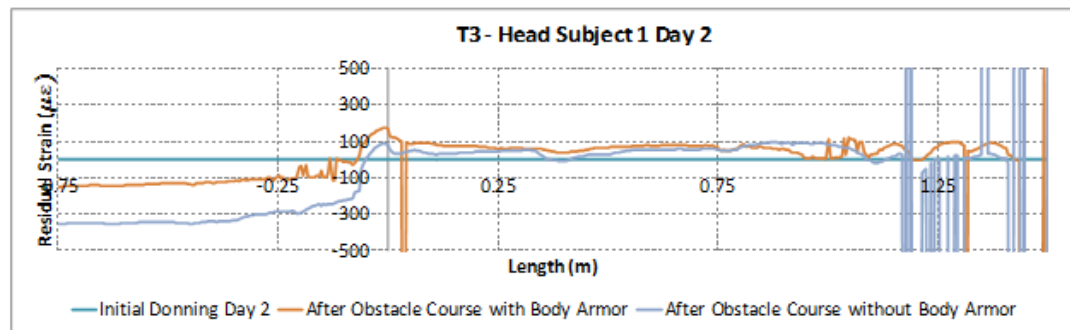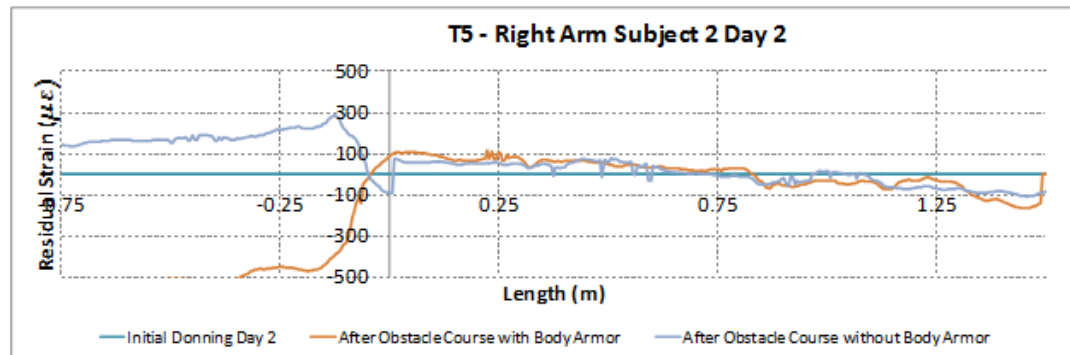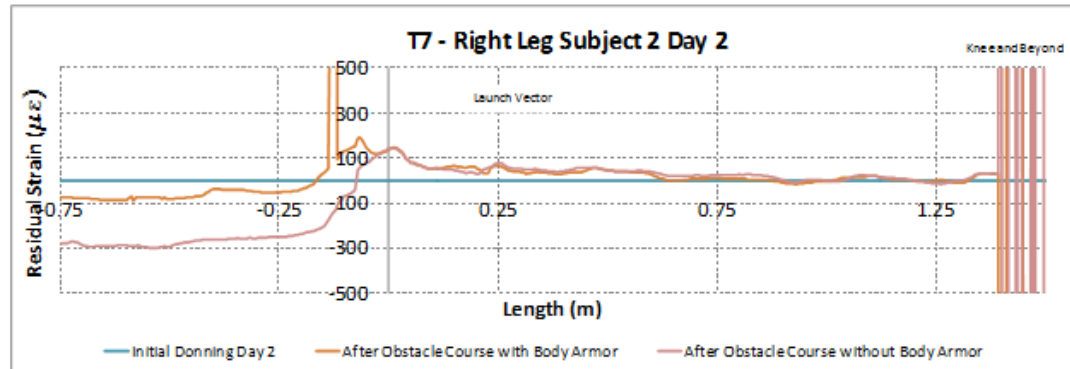




# Laboratory Testing



# Interpretation of Shape Data

- Data is output in the form of coordinates x,y,z along the length of the fiber which enables heading, pitch, and roll of defined segments
- Shape is typically displayed as a projection in three planes
- Specific regions of the fiber can be selected and the angle between them calculated
- Enables differential measurements of heading, pitch, and roll

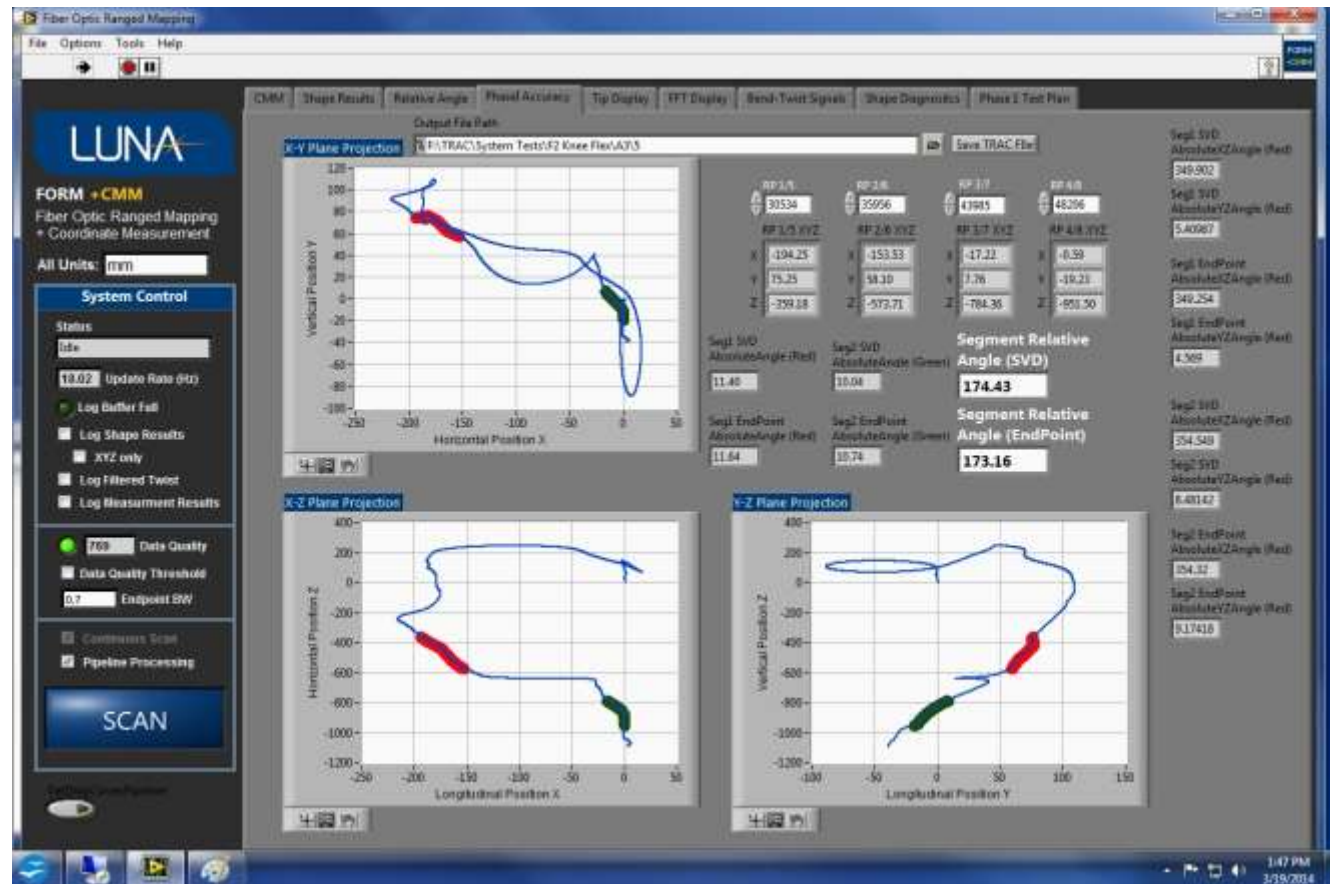







# 2D Angular Accuracy

- Relative accuracy refers to the angle between two segments
- Absolute accuracy refers to the angle from the start of the sensor

| 2D Relative Angle Test |                              |                             |                |
|------------------------|------------------------------|-----------------------------|----------------|
| Sensor ID:             | B129-02                      |                             |                |
| System ID:             | G3-2B                        |                             |                |
| Zone:                  | 2/3                          |                             |                |
| Basic Angle, Degrees   | Mean Measured Angle, Degrees | Standard Deviation, Degrees | Error, Degrees |
| 15                     | 14.9                         | 0.1                         | 0.1            |
| 30                     | 29.8                         | 0.2                         | 0.2            |
| 45                     | 44.8                         | 0.2                         | 0.2            |
| 60                     | 59.9                         | 0.3                         | 0.1            |
| 75                     | 74.7                         | 0.1                         | 0.3            |
| 90                     | 89.8                         | 0.2                         | 0.2            |
| 105                    | 104.9                        | 0.2                         | 0.1            |
| 120                    | 119.9                        | 0.2                         | 0.1            |
| 135                    | 134.9                        | 0.3                         | 0.1            |
| 150                    | 149.9                        | 0.2                         | 0.1            |
| 165                    | 165.0                        | 0.1                         | 0.0            |
| 180                    | 179.9                        | 0.2                         | 0.1            |
| 190                    | 190.0                        | 0.3                         | 0.0            |

| 2D Absolute Angle Test |                              |                             |                |
|------------------------|------------------------------|-----------------------------|----------------|
| Sensor ID:             | B129-02                      |                             |                |
| System ID:             | G3-2B                        |                             |                |
| Zone:                  | 3                            |                             |                |
| Basic Angle, Degrees   | Mean Measured Angle, Degrees | Standard Deviation, Degrees | Error, Degrees |
| 15                     | 14.9                         | 0.2                         | 0.1            |
| 30                     | 29.9                         | 0.1                         | 0.1            |
| 45                     | 44.9                         | 0.2                         | 0.1            |
| 60                     | 59.9                         | 0.1                         | 0.1            |
| 75                     | 75.0                         | 0.1                         | 0.0            |
| 90                     | 90.0                         | 0.0                         | 0.0            |
| 105                    | 104.9                        | 0.1                         | 0.1            |
| 120                    | 120.0                        | 0.1                         | 0.0            |
| 135                    | 134.9                        | 0.2                         | 0.1            |
| 150                    | 150.0                        | 0.2                         | 0.0            |
| 165                    | 164.9                        | 0.2                         | 0.1            |
| 180                    | 180.0                        | 0.1                         | 0.0            |
| 190                    | 190.1                        | 0.1                         | 0.1            |

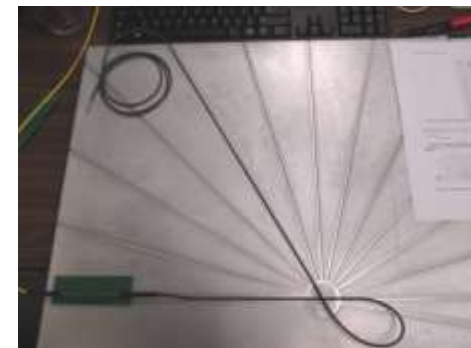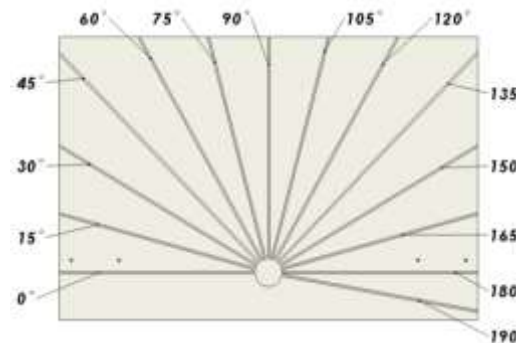

# Integrated Suit Testing

- Mannequin was fitted with an early generation suit and sensors
- Reference points were located on the suit to determine spatial and angular position.
- FARO arm was used as a comparison and results tabulated for each position tested


| <i>Relative angle (error in degrees)</i> |                   |                           |                   |
|--|-------------------|---------------------------|-------------------|
| <i>Test angle</i>                        | <i>mean error</i> | <i>standard deviation</i> | <i>95% CI (±)</i> |
| A1.a                                     | 0.34              | 0.19                      | 0.3705            |
| A1.b                                     | 0.37              | 0.31                      | 0.6045            |
| A1.c                                     | 0.37              | 0.29                      | 0.5655            |
| A2.a                                     | 0.51              | 0.28                      | 0.546             |
| A2.b                                     | 1.83              | 1.07                      | 2.0865            |
| A2.c                                     | 0.37              | 0.29                      | 0.5655            |
| E1.a                                     | 1.02              | 0.76                      | 1.482             |
| E1.b                                     | 0.26              | 0.27                      | 0.5265            |
| E1.c                                     | 0.32              | 0.26                      | 0.507             |
| H1.a                                     | 0.97              | 0.65                      | 1.2675            |
| H1.b                                     | 0.75              | 0.68                      | 1.326             |
| H1.c                                     | 0.95              | 0.26                      | 0.507             |
| H2.a                                     | 0.23              | 0.22                      | 0.429             |
| H2.b                                     | 0.36              | 0.21                      | 0.4095            |
| H2.c                                     | 0.26              | 0.12                      | 0.234             |
| H5.b                                     | 0.48              | 0.2                       | 0.39              |
| H5.c                                     | 0.29              | 0.16                      | 0.312             |
| F2.a                                     | 0.69              | 0.39                      | 0.7805            |
| F2.b                                     | 0.27              | 0.18                      | 0.351             |
| F2.c                                     | 0.95              | 0.26                      | 0.507             |



| Parameter (Definition)                 | Phase 1 Criteria | Achieved           | Results from Testing  |
|--|------------------|--------------------|---|
| Shape Accuracy as a function of length | 5%               | 1.64%              | <b>0.43 ± 0.68 % length (Component)</b><br><b>0.95 ± 0.69 % length (System)</b> |
| Relative angle accuracy                | ±1°              | <b>1.27° (max)</b> | <b>0.11° ± 0.39° (Component)</b><br><b>0.58° ± 0.69° (System)</b>               |
| Absolute angle accuracy                | ±1°              | <b>1.13° (max)</b> | <b>0.11° ± 0.27° (Component)</b><br><b>0.58° ± 0.55° (System)</b>               |



# System Demonstration



Video of the suit with the IMU Integrated



# Conclusions and Future Development



## Conclusions

- Luna has developed a system that will enable range of motion studies in a dynamic environment
- The feasibility and durability of the system has been demonstrated
- Environmental loads have been characterized that have been fed into the design to ensure that the system meets performance requirements

## Future Development

- Data acquisition system is being designed for increased reliability
- Modifications to the suit design are being conducted to implement the feedback from the Human Factors Test
- Once complete, additional testing will be used to verify the system





# Acknowledgement and Disclaimer



This project is funded by the Test Resource Management Center (TRMC) Test and Evaluation/Science & Technology (T&E/S&T) Program through the U.S. Army Program Executive Office for Simulation, Training and Instrumentation (PEO STRI) under Contract No. W900KK-13-C-0034.

Any opinions, findings and conclusions or recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the Test Resource Management Center (TRMC) Test and Evaluation/Science & Technology (T&E/S&T) Program and/or the U.S. Army Program Executive Office for Simulation, Training and Instrumentation (PEO STRI).



# Backup

---






# Temperature, Shock, Vibration




- Vibration/shock data to be used to harden future design and packaging
- Maximum pk-pk shock without body armor of 8.5g which was higher than the 7g measured with the body armor.
- In general, most of the shock loads fell at or below 4g.
- The largest shock had a duration of 0.12 seconds while the bulk of the frequency content fell below 5 Hz.
- Performance objective of the system is to provide data at 5 Hz

30 Second Sample of Subject 2 Marching with Body Armor

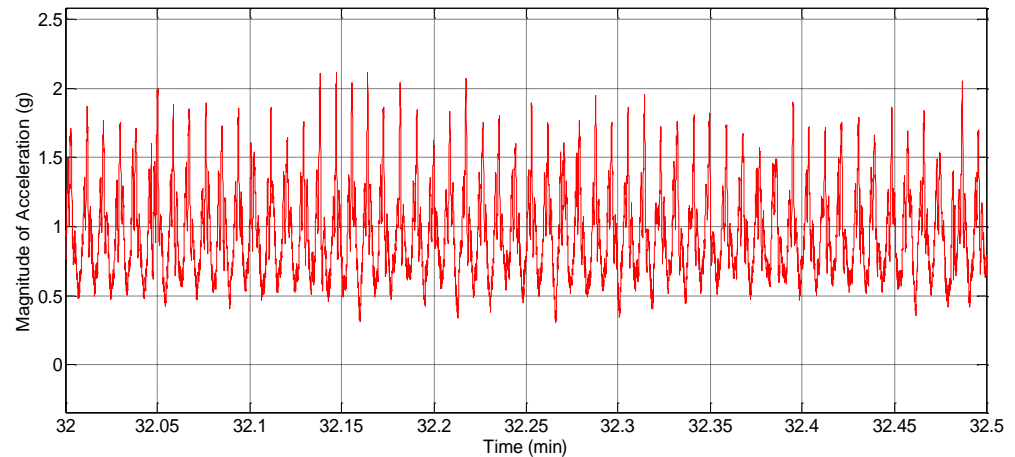


1.5 g's measured during standard road march

Without Body Armor

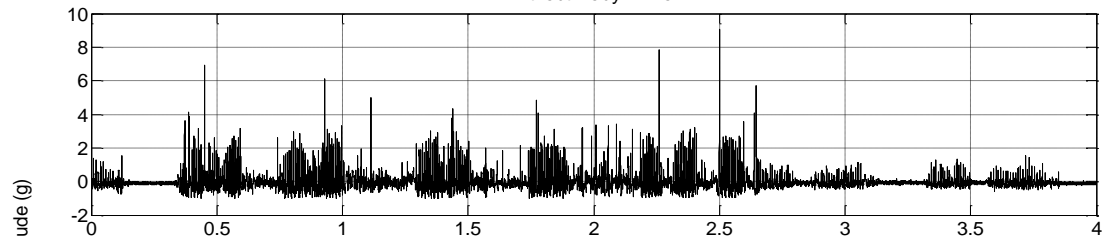

With Body Armor

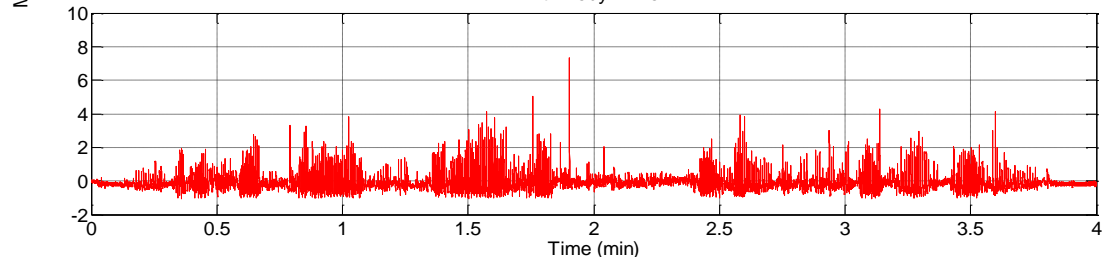



# Temperature, Shock, Vibration



- Live fire test using 7.62 NATO, 5.56 NATO and .45 ACP
- Accelerometer was located on the data acquisition system in the backpack.
- During the pistol test the accelerometer was firmly strapped to the forearm
- The lower caliber had a much higher magnitude over a shorter time than the larger 7.62 round achieving on the order of 20g's and settling in 0.03 seconds.
- The 7.62 round only achieved a magnitude on the order of 6-7 g's over a timespan of 0.12 seconds.

